


## Economic and durable ELECTRO-Mechanical OPERATING table

The AMNOTABLE COMFORT operating table combines the features of an operating table and a transport trolley. It is functional, comfortable and economical. The built-in place for the oxygen tank allows for use in outpatient surgery or one-day surgery.

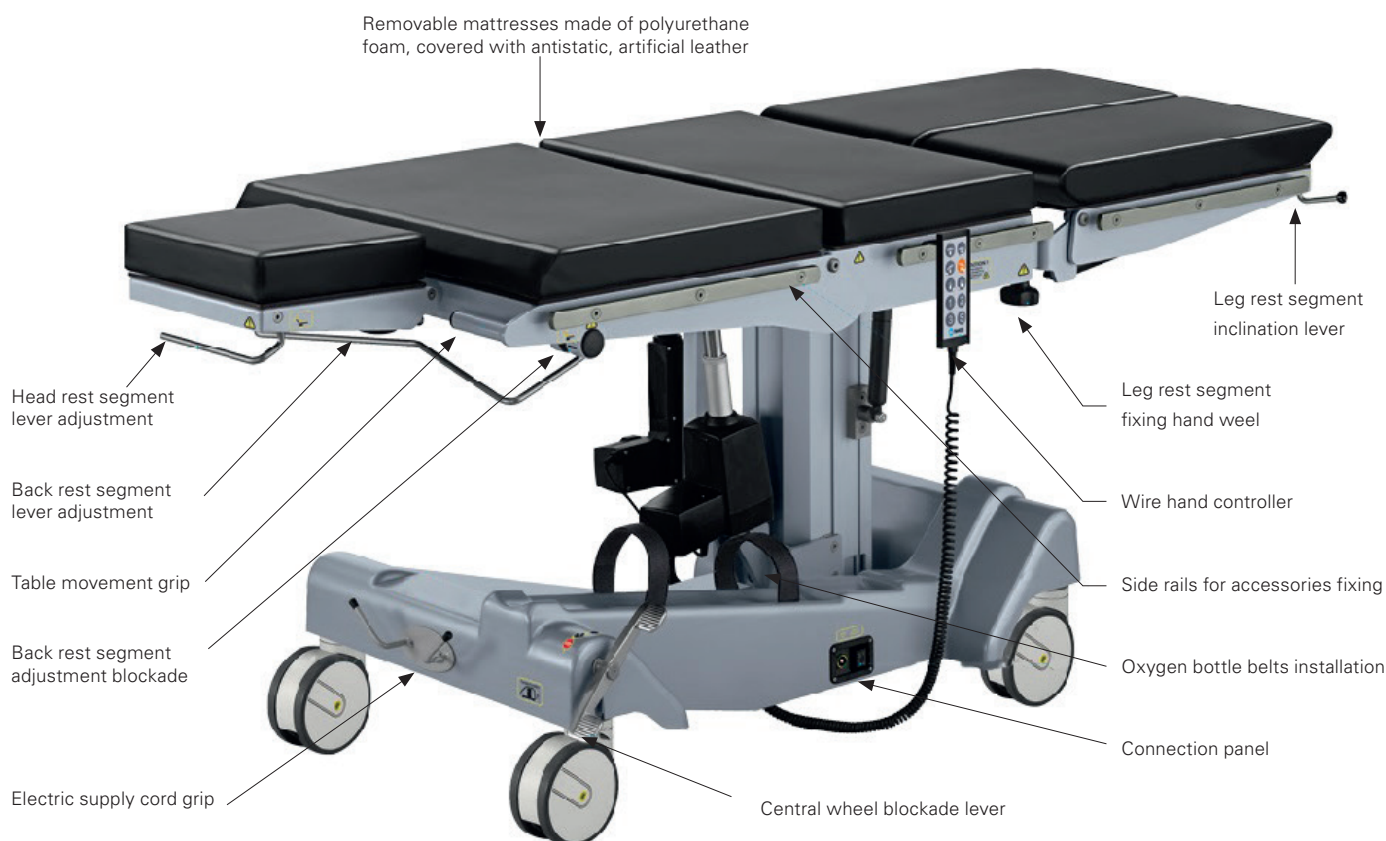

**82-014-05** 5 sections

Full range of specialist equipment is introduced inside "Accessories for OR-Tables" catalogue.

### Standard structure

- The table is made of carbon steel covered with powder lacquer, polyester-epoxy type. Operating table base is equipped with plastic cover. Entire table allows easy cleaning and is resistant to disinfectant agents
- Movable operating table base is equipped with diameter 150 mm wheels with one directional wheel. Base is equipped with wheels central blockade lever
- Removable table top segment mattresses are made of polyurethane foam covered with artificial leather resistant to disinfectant agents. Mattresses are special type and prevent creation of bed-sores for patient. These memory foam mattresses forms according to the body temperature
- Table top sections are X-ray translucent. Thanks to this, it's possible RTG photos execution on the table top and patient monitoring with C-arm use

### Functions and drives

- Table top height adjustment, lateral tilts, Trendelenburg and Reverse Trendelenburg tilts and the table top levelling are performed thanks to wire hand controller by the use of electro-mechanic drive system powered by 24 V batteries
- The back rest segment, head rest segment and leg rest segment adjustment is manually performed by gas springs with blockades
- Control system using the wire controller makes possible program arrangement and operating table setting up with table top at three charged positions (for example at horizontal position)




**82-014-05**      5 sections

|   |                              |
|---|------------------------------|
| Total table length with head rest segment                   | 2030 mm                      |
| Total table top width                                       | 650 mm                       |
| Mattress width x thickness                                  | 605 mm x 60 mm               |
| Table top height adjustment                                 | 750 to 1050 mm               |
| Trendelenburg position                                      | 20°                          |
| Reverse Trendelenburg position                              | 20°                          |
| Back rest segment adjustment                                | -40° to +85°                 |
| Head rest adjustment  | -65° to +35°                 |
| Inclination angle adjustment of plate leg rests             | -90° to +20°                 |
| Divided leg rest segment inclination angle adjustment       | -90° to +25°                 |
| Divided leg rest segment aside inclination angle adjustment | up to 180°                   |
| Lateral tilts   | ±20°                         |
| Battery power   | 24 V DC                      |
| Power supply  | 230/127/110/100 V~, 50/60 Hz |
| Power consumption   | 250 VA                       |
| Permissible load  | 200 kg                       |
| Total table weight  | 160 kg                       |




Operating table functions executed with use of the hand controller


750 to 1050 mm



20°




20°




Operating table functions executed manually

-40° to +85°



-65° to +35°



180°

