


State-of-the-art OPERATING table with electro-hydraulic control

AMNOTABLE PREMIUM is an universal product and offering numerous functions, high load capacity, good radiolucency parameters, longitudinal travel and large variety of compatible accessories.

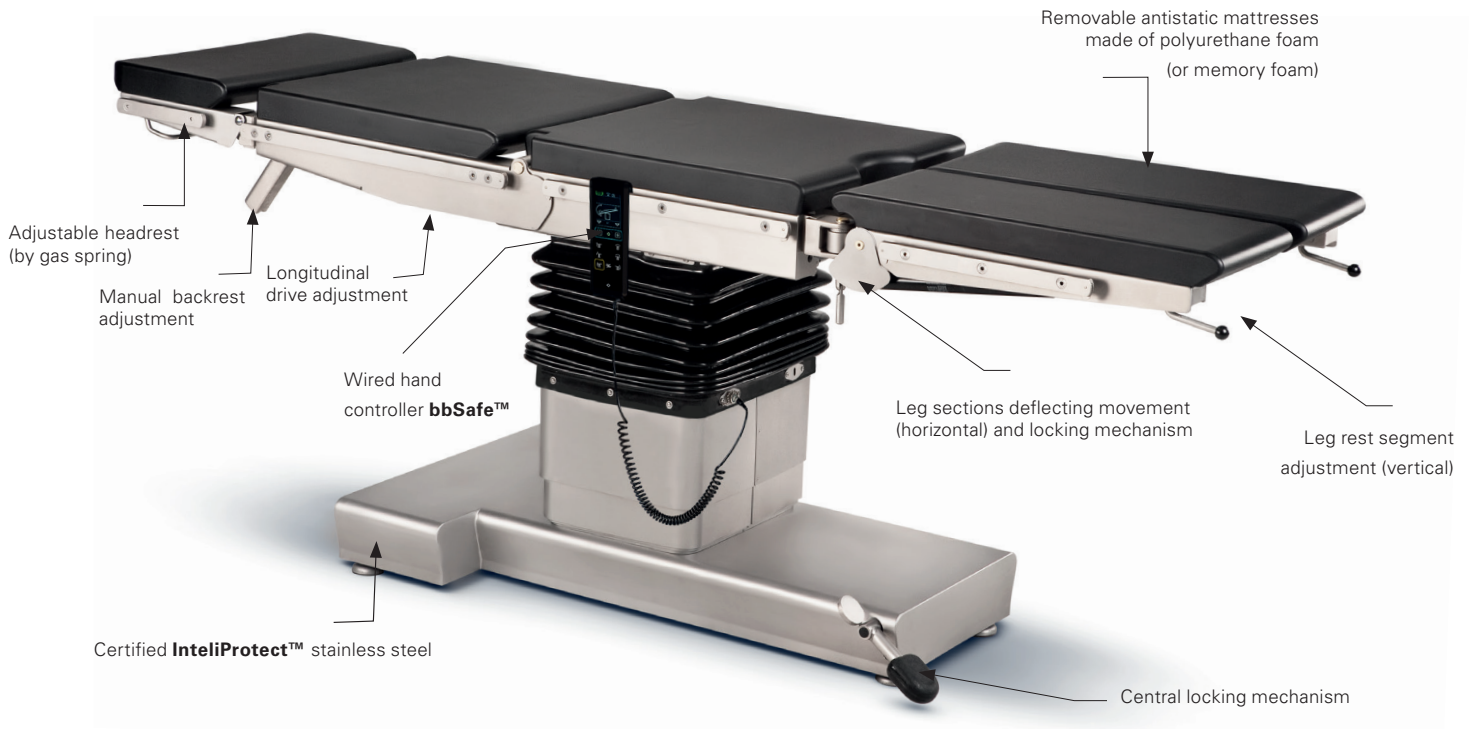

82-003-05	5 sections
82-003-06	6 sections

Full range of specialist equipment is introduced inside "Accessories for OR-Tables" catalogue.

Standard structure

- All steel components are made of acid-proof stainless steel with matt finish, resistant to disinfecting agents
- Mobile base is equipped with central locking system activated by a foot lever (T-shaped base: mechanical-hydraulic foldable pods; central lock with directional lock)
- Mattresses are easy removable from the table top section
- Surfaces of the tables are easy to be kept clean and are resistant to disinfecting agents
- The table top is X-ray translucent. It enables taking X-ray pictures and monitoring the patient with a C-arm

Functions and drives

- Table top height adjustment, lateral tilt adjustment, Trendelenburg and Reverse-Trendelenburg adjustment, table top leveling are executed by a remote controller with the use of electro-hydraulic motors and 24V **fCharge™** power supply. Hand controller is equipped with battery charge level indicator
- Back rest and leg rest segment (single section) and head rest segment angle adjustment are supported by gas springs equipped with locking mechanism
- Electro-hydraulic back rest segment (optional)
- Divided leg rest sections are being set up with the use of gas springs
- Kidney elevator height adjustment at 6 sections table top is manually executed with the use of the gear transmission located at head rest segment side
- Table top stepless longitudinal shift is executed manually
- Leg rest sections are deflected horizontally manually



Total length:

- 5-sections table top 2060 mm
- 6-sections table top 2060 mm



5-sections table top

Total width:

- 5-sections table top 550 mm
- 6-sections table top 550 mm



6-sections table top

Leg segment length:

- 5-sections table top 655 mm
- 6-sections table top 655 mm

Interchangeable sections

There is a possibility to switch the location of the head rest segment with leg rest segment



TECHNICAL DATA



82-003-05	5 sections
82-003-06	6 sections

Total table top length (with head rest)	2060 mm
Table top width	500 mm
Total table top width	550 mm
Table top height adjustment (without the mattresses)	680 to 1080 mm
Trendelenburg / Reverse-Trendelenburg	40°
Lateral tilt	±30°
Back rest segment adjustment	-40° to +85°
Head rest segment adjustment	-50° to +55°
Kidney elevator height adjustment	150 mm
Kidney elevator adjustment angle	110°
Leg rest segment inclination adjustment	-90° to +25°
Maximum leg rest segment inclination	180°
Table top longitudinal shift	340 mm
fCharge™ battery power	24 V DC
Maximum permissible load static/dynamic	350 kg / 200 kg
Total table weight	250 kg
Protection grade (IP Code in IEC standard 60529)	IP-X4